

### Description

- Recessed luminaire certified IP65
- Rated for ISO Class 3-8 Cleanrooms
- 1 piece **Inset Door** w/welded corners seals directly to fixture housing & triple gasketed for wet locations and 2500psi washdown
- Also certified for NSF2 food, splash and non-food zones
- Available in multi-channel, narrow band LED ( Amber & Red) for photosensitive pharma and semiconductor applications

### Features

**Delivered Light Output:** Up to 10,000 lumens per channel  
PCAmber/Red/PC White

**Input Power:** ( see chart )

**LED Drivers:** multiple options incl. dual drivers for 2 circuit switching

**White LED CRI Options:** 80 CRI, 90 CRI + Engineered SunSpectra

**CCT:** 3000K-5000K / Options Tunable White 2700K/6500K

**Input Voltage:** Universal 120-277V or 347V

**Limited Warranty:** 5 Years

**Body Construction:** 20 Ga. cold rolled steel (Std.) , precision formed, seam welded, one-piece, hole free construction

**Door Frame:** Removable and reversible, **inset** one-piece door frame, 18 Ga. cold rolled steel w/ welded corners. Countersunk stainless steel captive fasteners.

**Lens:** .125" High Impact Acrylic (Std.) w/symmetric diffuse inner layer and smooth external layer for easy cleaning. Sealed to doorframe with RTV silicone sealant and continuous perimeter brackets


**Grid:** Designed for universal mounting for 1.0" & 1.5" T-Bar NEMA LE4 Type G Ceilings. 2" T-Bar Grid consult factory. Flange installation supported by swing style mounting brackets

### Approvals:


- UL 1598 & 8750 ( US & Can.) recessed type IC for insulated ceilings
- NSF2 for Food, Splash and Non-Food Zone
- ISO Class 3-8 Cleanroom
- Biosafety BLS1-2
- IP65 rated for 2500 psi washdown applications.



Dimensions ( Inches)							
	A	B	C	D	E	F	Wgt
1x4	47.75	11.75	10.69	46.75	10.69	46.75	32 #
2x2	23.75	23.75	22.69	22.88	22.69	22.88	29 #
2x4	47.75	23.75	22.69	46.75	22.69	46.75	50 #



Inset Door in T-bar Grid Ceiling  
Door frame sits inside fixture and mounts flush inset into fixture body

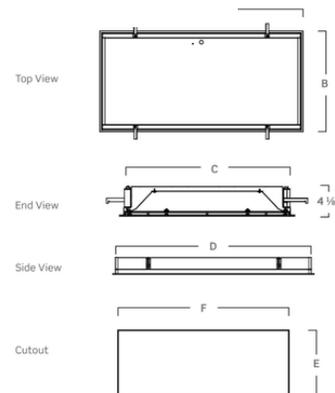

Series	Size	Door	Housing	White CCT	LEDS	Lens	Voltage	Options
CRI38	<b>14</b>	<b>CS</b>	<b>CS</b>	<b>30K</b>	See Next Page	<b>IA</b>	<b>UNV</b> 120-277V <b>H</b> 347V	<b>2C</b> Dual driver 2 circuit switching
	1'x4'	18Ga. CRS Painted (Std)	20Ga.CRS Painted (Std)	3000K		.125" Prismatic Impact Acrylic		
	<b>22</b>	<b>SS4B</b>	<b>SS4P</b>	<b>35K</b>		<b>TG</b>		
	2'x2'	20Ga. 304SS#4 Brushed	20Ga. 304 SS Painted	3500K		0.157" Clear Tempered Glass		
	<b>24</b>	<b>SS4P</b>	<b>SS6P</b>	<b>40K</b>		<b>IP</b>		
2'x4'	20Ga. 304SS Painted	18Ga. 316 SS Painted	4000K	.125" Prismatic Polycarbonate				
		<b>SS6P</b>	<b>050P</b>	<b>50K</b>		<b>CA</b>		
		18Ga. 316SS Painted	.050" Alum. Painted	5000K		.125" Clear Impact Acrylic		
		<b>SS6B</b>		<b>27K-65K</b>		<b>CP</b>		
		18Ga. 316SS Brushed		Tunable White		.125" Clear Polycarbonate		
		Add'l materials available Consult Factory						See Next Page for More Options




### AMBER & WHITE LED PERFORMANCE DATA

"W" White Lumen values based on 4000K, 80 CRI

Size	Order Code	White Lumens	White Watts	White Efficacy	Amber Lumens	Amber Watts	Total System Watts
1x4	3W/3A	3585	32	112	3500	47	79
	3W/5A	3585	32	112	5500	74	106
	3W/7A	3585	32	112	7000	94	126
	7W/3A	7064	68	104	3500	47	115
2x2	3W/3A	3564	31	115	3500	46	77
	3W/5A	3564	31	115	5500	76	107
	3W/7A	3564	31	115	7000	97	128
	7W/3A	7035	65	108	3500	46	111
2x4	5W/3A	5517	45	123	3500	46	77
	5W/5A	5517	45	123	5500	61	106
	5W/7A	5517	45	123	7000	81	126
	7W/3A	7085	59	120	3500	41	100
	7W/5A	7085	59	120	5500	61	120
	7W/10A	7085	59	120	10000	122	181
	10W/3A	10093	80	126	3500	41	121
	10W/5A	10093	80	126	5500	61	141
	10W/7A	10093	80	126	7000	81	161
	10W/10A	10093	80	126	10000	122	202

Photometric data based on "7A"  
Amber Channel Only


Characteristics	
Fixture Lumens	7002
Efficacy (lpw)	86.4
Total Fixture Watts	81
S.C. (0-180)	1.2
S.C. (90-270)	1.18
S.C. (diagonal)	1.3

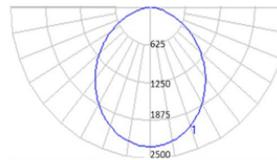

Luminance (cd/sq.m)			
Degrees	0-deg	45-deg	90-deg
45	3281	3131	3082
55	2914	2750	2688
65	2432	2248	2185
75	1712	1501	1485
85	514	655	856

Zonal Lumens	
Zone	Lumens
0-30	2169
0-40	3480
0-60	5833
0-90	7002
90-180	0

Amber	
Purity	96%
Peak ( Lambda)	604nm
Radiometric Power <480nm	0.80%
UV Output	0.00%
FWHM (Bandwidth)	89nm






### RED & WHITE LED PERFORMANCE DATA

"W" White Lumen values based on 4000K, 80 CRI

Size	Order Code	White Lumens	White Watts	White Efficacy	Red Lumens	Red Watts	Total System Watts
1x4	3W/1R	3585	32	112	1000	31	63
	5W/1R	5538	51	109	1000	31	82
	7W/1R	7064	68	104	1000	31	99
2x2	3W/1R	3564	31	115	1000	30	61
	5W/1R	5571	50	111	1000	30	80
	7W/1R	7035	65	108	1000	30	95
2x4	5W/1R	5517	45	123	1000	27	72
	5W/2R	5517	45	123	2000	62	107
	7W/1R	7085	59	120	1000	27	86
	7W/2R	7085	59	120	2000	62	121
	10W/1R	10093	80	126	1000	27	107
	10W/2R	10093	80	126	2000	62	142
	12W/1R	12096	99	122	1000	27	126
	12W/2R	12096	99	122	2000	62	161
	18W/1R	18103	143	127	1000	27	170

Photometric data based on "2R"  
Red Channel Only

Characteristics	
Fixture Lumens	2000
Efficacy (lpw)	32
Total Fixture Watts	62
S.C. (0-180)	1.2
S.C. (90-270)	1.17
S.C. (diagonal)	1.3



Luminance (cd/sq.m)			
Degrees	0-deg	45-deg	90-deg
45	937	894	880
55	832	785	768
65	695	642	624
75	498	429	424
85	147	187	244

Zonal Lumens	
Zone	Lumens
0-30	619
0-40	993
0-60	1665
0-90	2000
90-180	0

Red	
Purity	100%
Peak (lambda)	635nm
Radiometric Power <480nm	0.03%
UV Output	0.00%
FWHM (Bandwidth)	18nm

