



DESCRIPTION


The L300 low-profile luminaire is available in both lens and baffle body styles. Configured for either individual or continuous runs, the L300 LED series offers a partially curved design with a flat underside providing a great choice for those looking to add a more aesthetically pleasing, high end look to their finished lighting projects specifying solid function and appealing form.

SPECIFICATIONS


Housing:	20 gauge cold-rolled steel construction
Lengths:	4' and 8' fixtures that can also be joined for continuous rows
Finish:	Durable, low gloss, textured powder coated finish
End Caps:	Flat end cap provides a clean finish
Approvals:	UL/CUL
LED Engine:	Dimming driver and LED board combination
Optional Drivers:	Lutron, Osram, EldoLED and other options available
Distribution:	Standard 80/20 with optional distributions available
Optic:	Available in Lens or Flush Baffle
Output Package:	Super Saver, high output, and very high output lumen levels available
Sensor:	Optional Integrated daylight or occupancy sensors
LED Color:	Available color temperatures of 3000k, 3500k, and 4000k
Mounting:	Aircraft grade cable with fully adjustable yoke mount
Ceiling Type:	T-bar or hard ceiling mounting kits available
Battery:	Optional 12 watt constant power emergency battery
CRI:	82+
I.E.S. Data:	Available upon request
Warranty:	5-Year limited warranty

PHOTOMETRICS


* Measurements based on High level output




80/20 - Standard
5416 lumens
83% up - 17% down
112 lm/W




60/40 - Option
4832 lumens
59% up - 41% down
99 lm/W



50/50 - Option
4542 lumens
52% up - 48% down
93 lm/W



30/70 - Option
4014 lumens
27% up - 73% down
83 lm/W



20/80 - Option
3757 lumens
18% up - 82% down
77 lm/W




FIXTURE OPTIONS

Ordering Example: L350-4-30-120-VHO-WHT-FF

FIXTURE SERIES	LENGTH	LED COLOR	VOLTAGE	OUTPUT	DISTRIBUTION TYPE	EMERGENCY CIRCUIT	FINISH	INTEGRATED SENSOR	OPTIONS
L350 Lens	4	30 3000k	MVO 120-277v	SS Super Saver	Blank Standard	Blank None	WHT	Blank None	Blank None
L345 Flush Baffle	8	35 3500k	120 120v	HO High Output	64 60% up, 40% down	EF Separate individual emergency feed		DAY Daylight	FF Fast blow fuse
		40 4000k	277 277v	VHO Very High Output	55 50% up, 50% down	EHF Emergency through wiring with separate feed	* Consult factory for custom colors	OCC Occupancy	FS Slow blow fuse
		50 5000k	347 347v		37 30% up, 70% down	EHS Emergency through wiring single feed with shared neutral			EB Emergency battery
					28 20% up, 80% down				EC Emergency circuit
									* Consult factory for Lutron, ELdoLED, Osram, or other drivers

* END CAP KIT: 300-WHT (One kit required per fixture run)

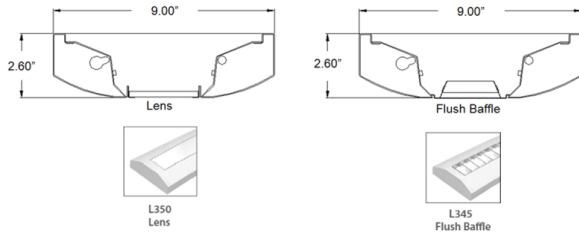


L350

4' Output Package	Lumens	Watts	Lumens/Watt
Super Saver (SS)	4649	41	113
High (HO)	5416	48.2	112
Very High (VHO)	7479	72.5	103

* Based on 4000k

MOUNTING SUPPORT LENGTHS & FIXTURE WEIGHTS

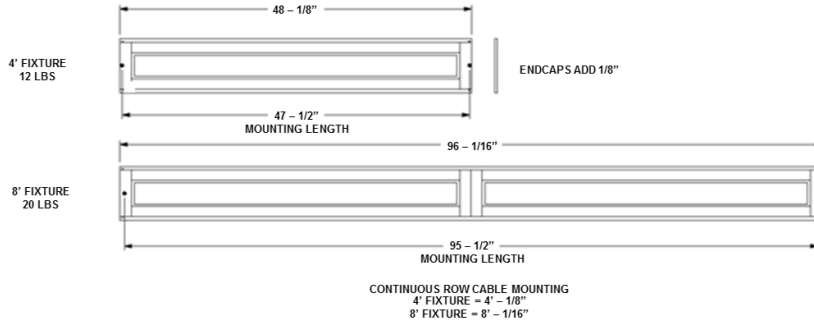

HARDWARE ORDERING EXAMPLE: SFD-Y-15C-FA-36

PREFIX	FIXTURE ATTACHMENT	CEILING TYPE	SUSPENSION	SUSPENSION LENGTH
SFD	Single circuit feed dimmable	HC Hard ceiling	FA Fully assembled	18 24" adjustable cable
ECF	Emergency circuit feed	SC Screw set clip		24 30" adjustable cable
NP	Non-power feed	15C 15/16" tee clip		36 42" adjustable cable
	(consult factory for variations)	9C 9/16" tee clip		72 78" adjustable cable
				144 150" adjustable cable

KIT CONTENTS

- Support clips for T-bar, OR straps for J-box, with threaded stud for cable connection
- One white canopy
- Aircraft cable
- Feed cord (except non-feed hangers)
- Fixture attachment hardware

MOUNTING TYPES

